

2 x 3 - 3500# Drop axle specifications

From rear of brake flange to end of spindle stock



Center of spindle above axle tubing = 3/4"



Axle drop for 2 x 3 axle with axle under the springs=

Center of spindle = 3/8" above the *bottom* of the spring

3/8" thick spring pad


Axle drop for 2 x 3 axle- with axle on top of spring = Center of spindle is 4.1/8" above top of spring

Champion Trailers* 2 X 3 Drop Axle Specifications

All design information & Specifications contained in this drawing are the property of Champion Trailers* - By DJB

2 x 2 - 3500# Drop axle specifications

From rear of brake flange to end of spindle stock

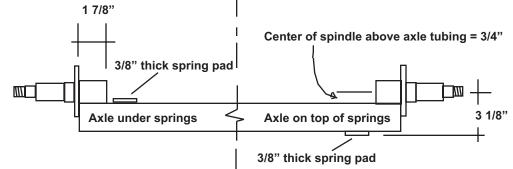

Axle drop for 2 x 2 axle with axle under the springs=

Center of spindle = 3/8" above the bottom of the spring

Axle drop for 2 x 2 axle- with axle on top of spring =

Center of spindle is 3 1/8" above top of spring

Champion Trailers*
2 X 2 Drop Axle Specifications

All design information &
Specifications contained in this
drawing are the property of
Champion Trailers* - By DJB
2/22/04